


Particle board construction, lock down raised access floor panels to the requirements of BSEN 12825.

PANEL ILLUSTRATION

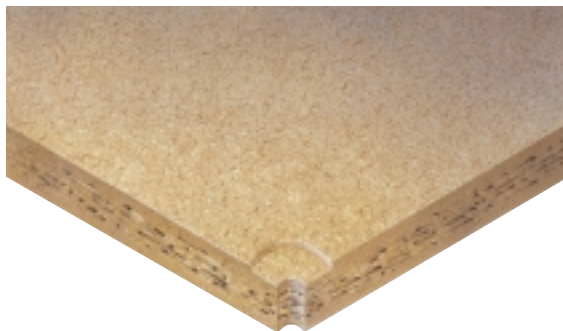

FEATURE BENEFITS

- Lock down system for maximum rigidity and stability
- Light weight reduces floor slab loadings - makes lifting easy
- Solid underfoot - no creaking or rocking
- Unauthorised entry deterred
- Fully accessible and interchangeable panels
- Chamfered panel edges that ease lifting and replacement

TYPICAL AREAS OF APPLICATION

General office areas, light and medium use.

DESCRIPTION

This lock down floor panel range is fully rated to the requirements of the Harmonised European Standard for raised access floors, BSEN 12825. The design incorporates a unique lock down system which allows a minimum number of fixings to be used.

The D-Lock system provides a cost effective solution to providing a solid platform with all of the attributes that are required of a raised access floor system.

Category	Lock down
Panel Size	600mm square
Core Material	High Density Particle Board
Panel Construction	Machined Particle board that includes lock down provision

	Panel Thickness (nominal)	System Weight (typical)
D-Lock 30	30mm	26kg/m ²
D-Lock 38	38mm	31kg/m ²

CONSTRUCTION

These floor panels are based on a 600mm square module constructed around a high performance chipboard core. This chipboard core is machined by a process that ensures the required tolerances are met. This machining process also includes the provision of the corner lock down facility. Corner locking is achieved using a clamping washer and screw, eliminating panel movement and limiting unauthorised access to the floor void.

The pedestal head cap includes a plastic moulding that provides positive location for the panel and includes provision for the lock down screw.

STRUCTURAL PERFORMANCE

Panel Type	BSEN 12825 Classification	Ultimate Load	Uniformly Distributed Load
D-Lock 30	1/A/3/2	In excess of 4kN	7.5kN/m ²
D-Lock 38	2/A/3/2	In excess of 6kN	10kN/m ²

- The above information is based on testing in compliance with the BSEN 12825 specification. The classifications shown are based on a deflection under working load not exceeding 2.5mm and a safety factor of 3.
- Uniformly distributed loads are shown for information as they do not form part of BSEN 12825. However the figures shown are based on testing in accordance with BSEN 12825.
- Finished floor heights from 60mm to 1000mm are available using one of our standard pedestals. For heights outside of this range alternative pedestals are available.
- The classifications given are based on the use of the Kingspan range of pedestals.

SPECIAL APPLICATIONS

Bridging Sections	Where obstructions in the void prevent the use of pedestals.
Pedestal Mechanical Fixings	To fix pedestals to floor in addition to adhesive for greater rigidity at increased floor heights/increased loadings or in situations where the sub-floor requires additional fixing.
Perimeter Gasket	20 x 9mm foam tape applied to the panel edge between floor and wall if required.
Ramps and Steps	Provided to accommodate changes in floor level.

**Kingspan Access Floors Limited**

Head Office: Burma Drive, Marfleet, Hull HU9 5SG

Tel: +44 (0) 1482 781701 Fax: +44 (0) 1482 799272

Internet: www.kingspanaccessfloors.co.ukEmail: marketing@kingspanaccessfloors.co.uk